

Special Features

- ▲ VANITY OR WALL MOUNTING OPTION
- ▲ DISCREET WASTE GULLEY WITH COVER
- ▲ SPLIT LEVEL DUAL HEIGHT OPTION TO INCLUDE DISABLED USERS AND CHILDREN
- ▲ TAPLANDING DESIGN
- ▲ EASY TO CLEAN AND MAINTAIN
- ▲ SMOOTH NON-POROUS HYGIENIC DESIGN
- ▲ WIDE CHOICE OF COLOURS
- ▲ CAN BE SUPPLIED WITH OPTIONAL SENSOR TAPS OR MECHANICAL TAPS

Description

The Rezina Contemporary solid surface wash trough features a slot drain into a waste gulley that is concealed by a removable gulley cover. The trough is ideally suited for use in schools, universities, nightclubs, bars, restaurants, office and hotel washrooms, where a modern aesthetically pleasing appearance is desired. The wash trough can be supplied in a choice of standard or special colours with a tap landing (for deck mounted outlets). The solid surface wash trough is designed for mounting to vanity units (by others) with the option for wall mounting if desired. A split level dual height option can be supplied to facilitate use by disabled users and children. The Rezina Contemporary wash trough is supplied in a range of standard and made-to-measure lengths.

Construction

The Contemporary wash trough is manufactured from a blend of acrylic resin, natural pigments and aluminium hydroxide to give a natural stone appearance. A two stage thermal curing process at high temperature gives the solid surface material superb strength and durability. The wash trough is formed with a fall to a rear gulley for drainage and is supplied complete with a removable cover for ease of cleaning and maintenance. With the cover in place the trough shows a discreet drainage slot giving the unit an attractive contemporary appearance. Designed for deck mounting, or "sit-on" type installation onto an existing vanity unit type construction (by others). Optional metal brackets can be supplied for wall mounting the trough. Available in seven standard lengths, all solid surface wash troughs are supplied with an unslotted flush grated waste fitting and tap holes as required.

Please note that in certain installations the cover, being removable, could be at risk from vandalism or abuse. It is recommended that if there are any concerns the cover be removed during installation to leave the rear gulley exposed.

Sizes

Available in standard lengths: 600, 1200, 1500, 1800, 2400, 3000 and 3600mm and made to measure sizes up to 3600mm.

Options

- ▲ Special colours
- ▲ Metal wall mounting brackets
- ▲ Split level dual height to include use by disabled users and children
- ▲ "Non-Touch" sensor taps
- ▲ Mechanical taps

Order Codes and Technical Specification


Please refer to the Technical Specification Sheet



White with optional sensor operated taps. Shown with gulley cover removed



Black with optional sensor operated taps. Shown with gulley cover in place.

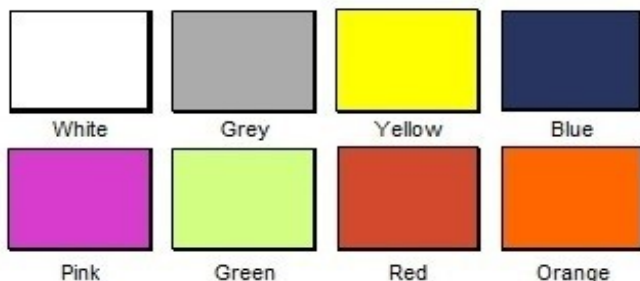

Standard colours:

These colours are an indicative guide only as colour rendition varies between screens and printers