
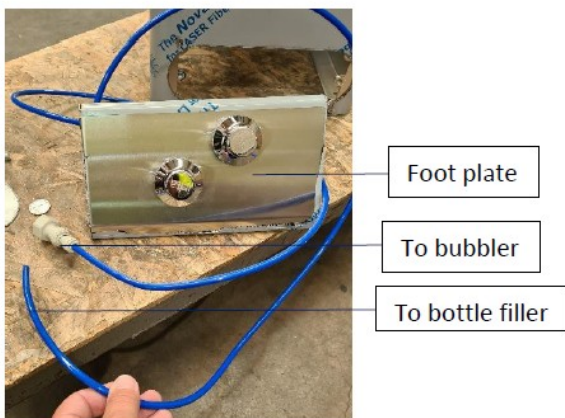


BF904 FITTING INSTRUCTIONS

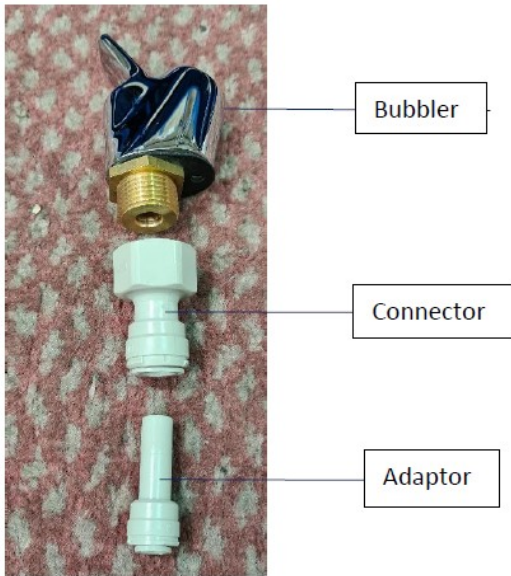

1. Remove the rear access panel and access door for ease of access. Discard the rear access panel if the unit is to be fitted to the wall.
2. The bubbler needs to be fitted to the tap hole in the top of the drinking fountain. Secure to the top with the brass nut supplied.
3. The connector and adaptor will already be fitted to the bubbler water supply pipe on the foot valve. The connector will need to be screwed tightly to the threaded tail of the bubbler.
4. Attach the bottle filler supply pipe to the elbow on the top of the bottle filler outlet - this is a push fit and needs to be securely pushed into the fitting.
5. The foot plate is supplied loose for safety in transport. The foot valves are loosely fitted to the foot plate. Tighten the foot valves - the securing nuts are under the chrome fascia cover. The foot plate is secured to the unit with two bolts.
6. The unit can be securely fitted to both the floor and wall for security (fittings not supplied).
7. The waste fittings are pre-fitted with flexible waste pipes and a Tee is supplied to join these together if required. The waste pipes need to be connected to the building's wastewater outlet (a waste trap not supplied is required.)
8. Connect your water supply to both foot valves - depending on the fittings you are using this may be easier before the foot plate is secured to the unit.
9. Check all inlet and outlet connections for leaks.
10. The flow of the water bubbler can be adjusted with the adjuster below the water outlet if required.
11. All units should be installed and checked by a qualified plumber.
12. Remove protective coating and thoroughly clean the unit with warm soapy water and a clean cloth. All further cleaning should only be undertaken with warm soapy water.
13. All installation advice provided in these instructions are offered as an opinion only and the customer accepts such opinions at their sole discretion and risk.