


SAFETY SHOWERS AND EYE WASH STATIONS


	Page
Wall Mounted Eye Wash with Plastic Bowl.....	108
Wall Mounted Eye Wash with Stainless Steel Bowl.....	108
Wall Mounted Eye Wash with Lid and Stainless Steel Bowl.....	109
All Stainless Steel Wall Mounted Eye Wash.....	109
Free Standing Eye Wash with Plastic Bowl	110
Free Standing Eye Wash with Foot Control and Plastic Bowl.....	110
Free Standing Eye Wash with Stainless Steel Bowl	111
Free Standing Eye Wash with Foot Control and Stainless Steel Bowl.....	111
Free Standing Eye Wash with Lid and Stainless Steel Bowl.....	112
Free Standing Eye Wash with Foot Control, Lid and Stainless Steel Bowl.....	112
Wall Mounted Drench and Eye Wash Hose	113
Portable Eye Wash Unit	113
Ceiling Mounted Safety Shower with Plastic Head.....	114
Ceiling Mounted Safety Shower with Stainless Steel Head.....	114
Wall Mounted Safety Shower with Plastic Head.....	115
Wall Mounted Safety Shower with Stainless Steel Head.....	115
All Stainless Steel Wall Mounted Safety Shower	116
Free Standing Safety Shower with Plastic Head	116
Free Standing Safety Shower with Stainless Steel Head	117
All Stainless Free Standing Safety Shower	117
Combined Safety Shower and Eye Wash with Plastic Head and Bowl.....	118
Combined Safety Shower and Eye Wash with Stainless Steel Head and Bowl.....	118
All Stainless Steel Combined Safety Shower and Eye Wash.....	119
Safety Shower Test Kit	119

S0420 WALL MOUNTED EYE WASH WITH PLASTIC BOWL

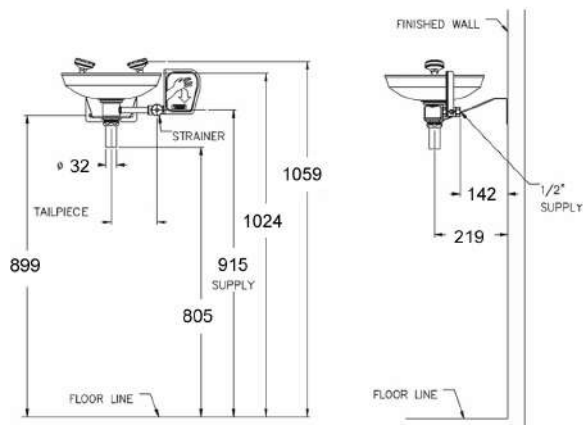


- ABS yellow plastic bowl, 300mm diameter
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle
- Yellow coated 3mm galvanised steel wall bracket
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls
- Flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0440 WALL MOUNTED EYE WASH WITH STAINLESS STEEL BOWL

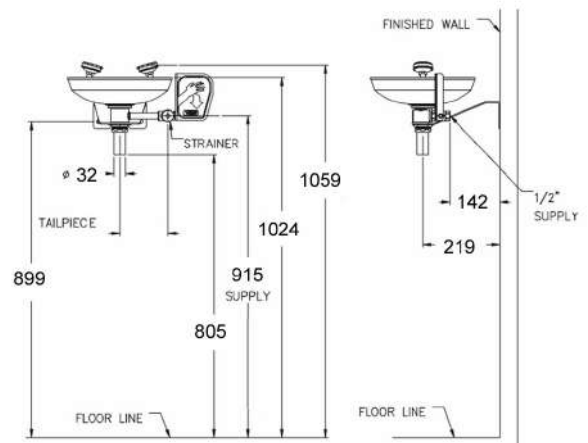


- Grade 304 stainless steel bowl, 300mm diameter
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle
- Yellow coated 3mm galvanised steel wall bracket
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls
- Flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0440-CS1 WALL MOUNTED EYE WASH WITH STAINLESS STEEL BOWL AND LID

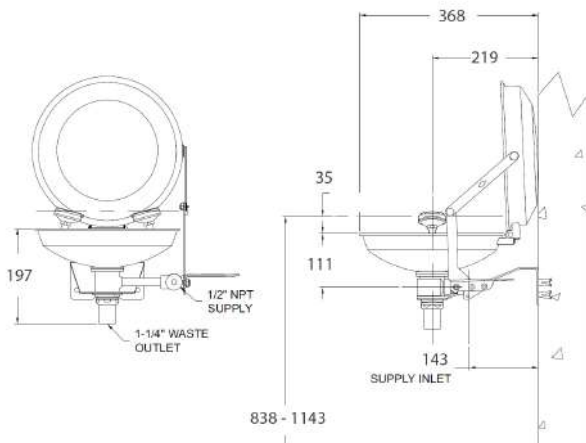


- Grade 304 stainless steel bowl, 300mm diameter
- Grade 304 stainless steel flip open clamshell cover/lid operated by the push handle
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle
- Yellow coated 3mm galvanised steel wall bracket
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls and flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0440-AS ALL STAINLESS STEEL WALL MOUNTED EYE WASH

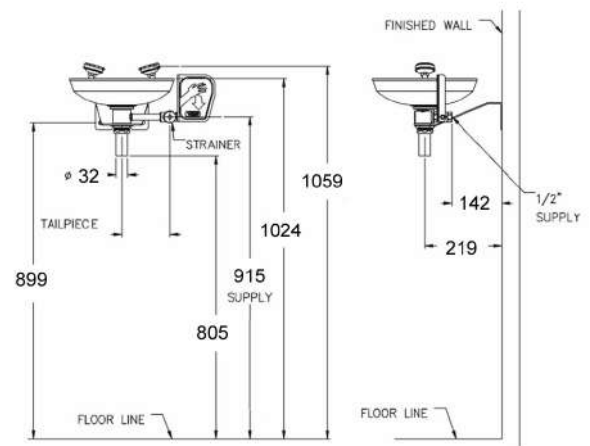


- Grade 304 stainless steel bowl, 300mm diameter
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" stainless steel stay open ball valve with stainless steel push handle
- Grade 304 stainless steel wall bracket
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls
- Flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0320 FREE STANDING EYE WASH WITH PLASTIC BOWL

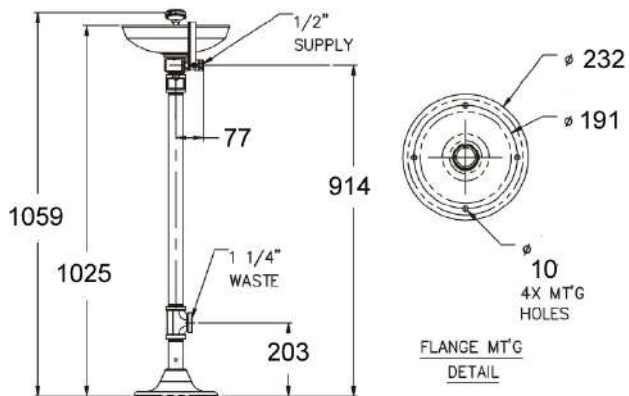


- ABS yellow plastic bowl, 300mm diameter
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle
- Yellow coated galvanised steel pedestal and cast iron floor flange
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls
- Flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0320-HFC FREE STANDING EYE WASH WITH FOOT CONTROL AND PLASTIC BOWL

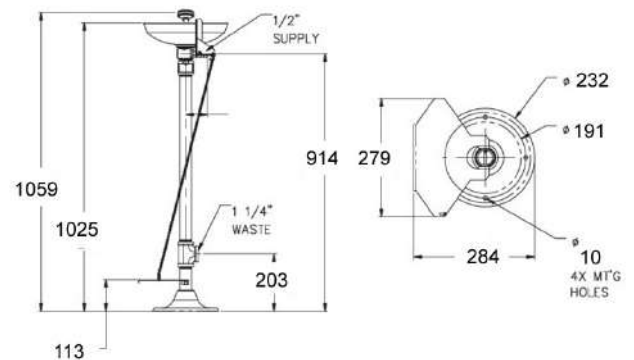


- ABS yellow plastic bowl, 300mm diameter
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle and foot pedal
- Yellow coated galvanised steel pedestal and cast iron floor flange
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls
- Flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0340 FREE STANDING EYE WASH WITH STAINLESS STEEL BOWL

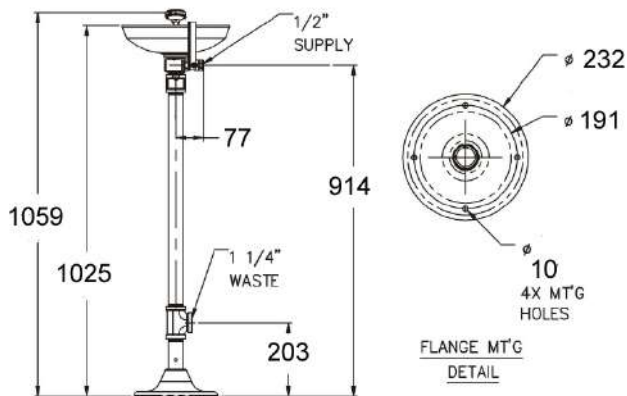


- Grade 304 stainless steel bowl, 300mm diameter
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle
- Yellow coated galvanised steel pedestal and cast iron floor flange
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls
- Flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0340-HFC FREE STANDING EYE WASH WITH FOOT CONTROL AND STAINLESS STEEL BOWL

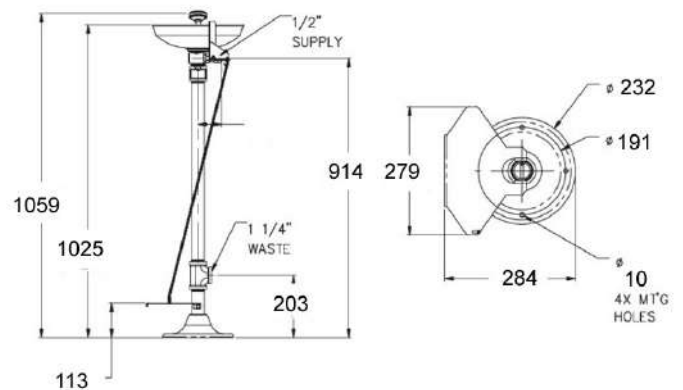


- Grade 304 stainless steel bowl, 300mm diameter
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle and foot pedal
- Yellow coated galvanised steel pedestal and cast iron floor flange
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls
- Flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0340-CS1 FREE STANDING EYE WASH WITH LID AND STAINLESS STEEL BOWL

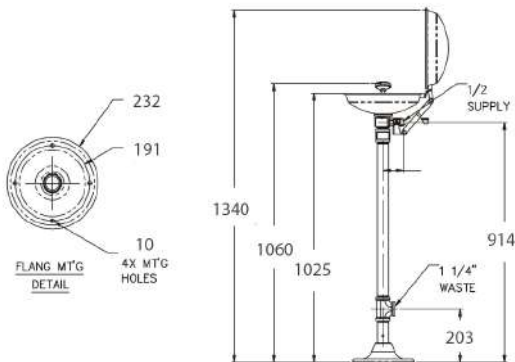


- Grade 304 stainless steel bowl, 300mm diameter
- Grade 304 stainless steel flip open clamshell cover/lid operated by the push handle
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle
- Yellow coated galvanised steel pedestal and cast iron floor flange
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls and flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0340-CS1-HFC FREE STANDING EYE WASH WITH FOOT CONTROL, LID AND STAINLESS STEEL BOWL

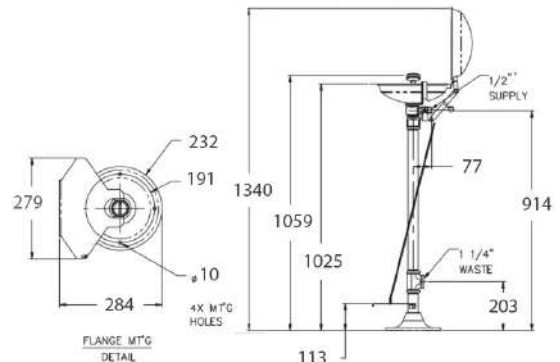


- Grade 304 stainless steel bowl, 300mm diameter
- Grade 304 stainless steel flip open clamshell cover/lid operated by the push handle and foot pedal
- ABS yellow plastic eye wash spray heads with flip open dust covers
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle and foot pedal
- Yellow coated galvanised steel pedestal and cast iron floor flange
- 32mm waste fitting
- BSP adaptors are supplied for all NPT pipe connections
- Internal filters and flow controls and flow rate 23.47 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0402/6 WALL MOUNTED DRENCH AND EYE WASH HOSE

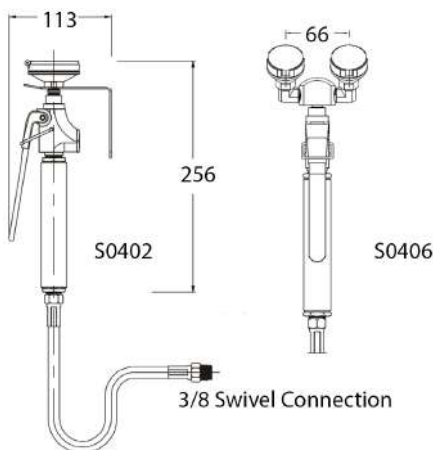


- ABS yellow plastic eye wash spray heads with flip open dust covers
- Chrome plated brass stay open valve with locking clip and stainless steel squeeze lever
- Yellow coated galvanised steel wall bracket
- Yellow PVC hose, 2438mm long with max working pressure of 300 psi
- Internal filters and flow controls
- Flow rate 11.73 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- S0402 with one head, model S0406 with twin heads
- In stock 1 to 2 working days

S0P50 PORTABLE EYE WASH UNIT

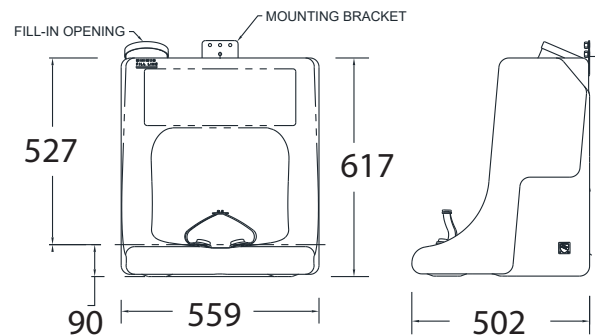


- High visibility yellow polyethylene construction
- ABS yellow plastic eye wash spray heads with pull off dust covers to operate
- 68 litre (18 gallon) water tank
- Flow rate 1.5 litres per minute to comply with ANSI Z358.1
- Supplies a full 15 minute eye wash capability
- Can be wall mounted or placed on a flat surface
- Stainless steel wall bracket
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Requires water preservative for long term use
- In stock 1 to 2 working days

S1100 CEILING MOUNTED SAFETY SHOWER WITH PLASTIC HEAD

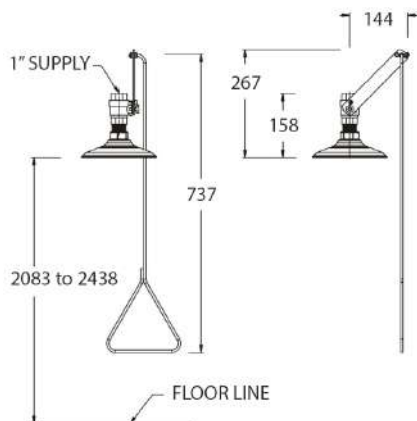


- ABS yellow plastic shower head, 190mm diameter
- Grade 304 stainless steel pull handle and activation lever
- 1" chrome plated brass stay open shower ball valve
- BSP adaptors are supplied for all NPT pipe connections
- Vertically mounted
- Flow rate 75.70 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Optional shower test kit
- In stock 1 to 2 working days

S2100 CEILING MOUNTED SAFETY SHOWER WITH STAINLESS STEEL HEAD

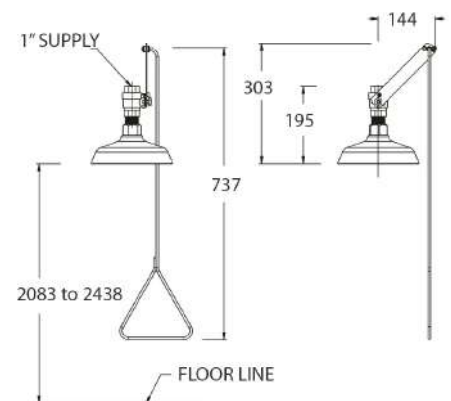

- Grade 304 stainless steel shower head, 200mm diameter
- Grade 304 stainless steel pull handle and activation lever
- 1" chrome plated brass stay open shower ball valve
- BSP adaptors are supplied for all NPT pipe connections
- Vertically mounted
- Flow rate 75.70 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Optional shower test kit
- In stock 1 to 2 working days

S1200 WALL MOUNTED SAFETY SHOWER WITH PLASTIC HEAD

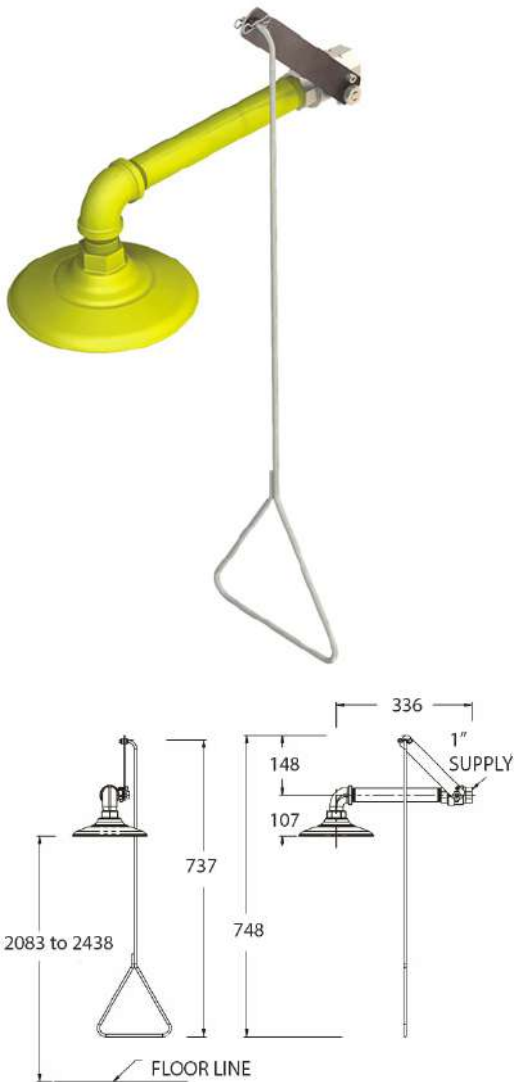


- ABS yellow plastic shower head, 190mm diameter
- Grade 304 stainless steel pull handle and activation lever
- Yellow coated galvanised steel pipework
- 1" chrome plated brass stay open shower ball valve
- BSP adaptors are supplied for all NPT pipe connections
- Horizontally mounted
- Flow rate 75.70 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Optional shower test kit
- In stock 1 to 2 working days

S2200 WALL MOUNTED SAFETY SHOWER WITH STAINLESS STEEL HEAD




- Grade 304 stainless steel shower head, 200mm diameter
- Grade 304 stainless steel pull handle and activation lever
- Yellow coated galvanised steel pipework
- 1" chrome plated brass stay open shower ball valve
- BSP adaptors are supplied for all NPT pipe connections
- Horizontally mounted
- Flow rate 75.70 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Optional shower test kit
- In stock 1 to 2 working days

S2200-AS ALL STAINLESS STEEL WALL MOUNTED SAFETY SHOWER

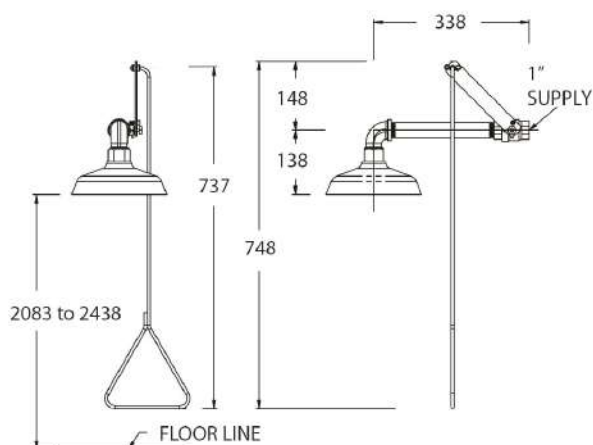


- Grade 304 stainless steel shower head, 200mm diameter
- Grade 304 stainless steel pull handle and activation lever
- Grade 304 stainless steel pipework
- 1" stainless steel stay open shower ball valve
- BSP adaptors are supplied for all NPT pipe connections
- Horizontally mounted
- Flow rate 75.70 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Optional shower test kit
- In stock 1 to 2 working days

S1300 FREE STANDING SAFETY SHOWER WITH PLASTIC HEAD

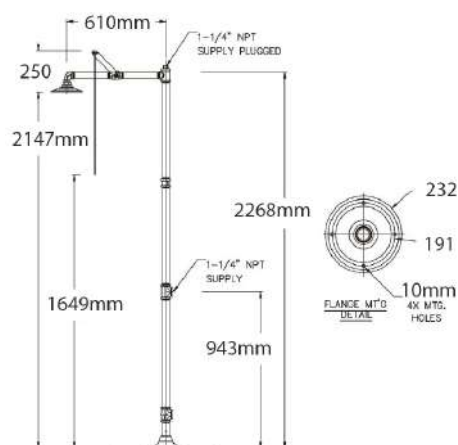


- ABS yellow plastic shower head, 190mm diameter
- Grade 304 stainless steel pull handle and activation lever
- Yellow coated galvanized steel pipework
- Yellow coated cast iron floor flange
- 1" chrome plated brass stay open shower ball valve
- BSP adaptors are supplied for all NPT pipe connections
- Flow rate 75.70 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Optional shower test kit
- In stock 1 to 2 working days

S2300 FREE STANDING SAFETY SHOWER WITH STAINLESS STEEL HEAD

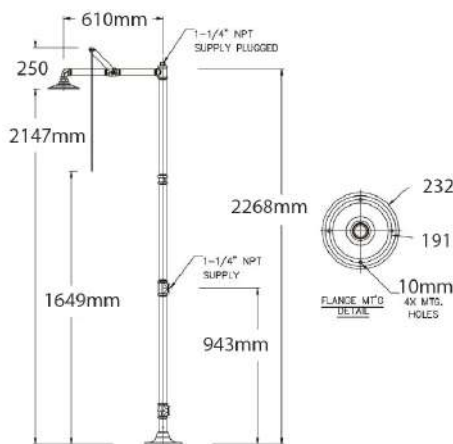


- Grade 304 stainless steel shower head, 200mm diameter
- Grade 304 stainless steel pull handle and activation lever
- Yellow coated galvanised steel pipework
- Yellow coated cast iron floor flange
- 1" chrome plated brass stay open shower ball valve
- BSP adaptors are supplied for all NPT pipe connections
- Flow rate 75.70 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Optional shower test kit
- In stock 1 to 2 working days

S2300-AS ALL STAINLESS STEEL FREE STANDING SAFETY SHOWER

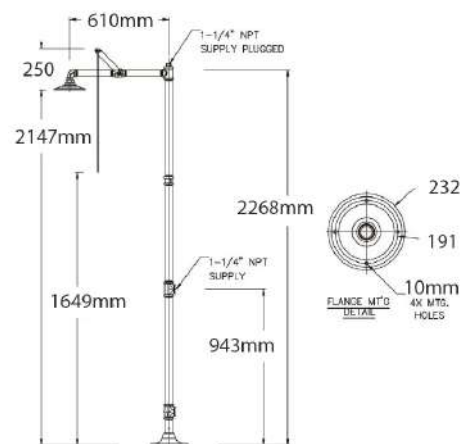


- Grade 304 stainless steel shower head, 200mm diameter
- Grade 304 stainless steel pull handle and activation lever
- Grade 304 stainless steel pipework
- Grade 304 stainless steel floor flange
- 1" stainless steel stay open shower ball valve
- BSP adaptors are supplied for all NPT pipe connections
- Flow rate 75.70 litres per minute
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- Optional shower test kit
- In stock 1 to 2 working days

S1320 COMBINED SAFETY SHOWER AND EYE WASH WITH PLASTIC HEAD AND BOWL

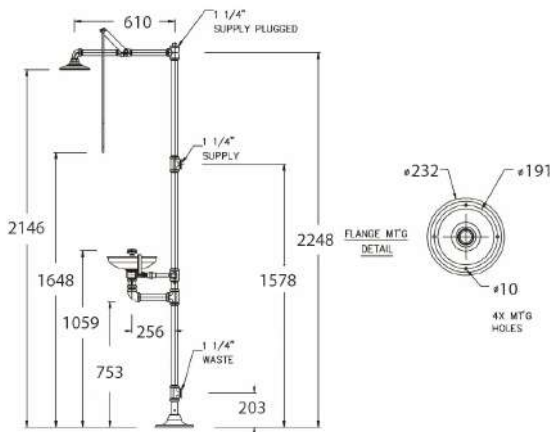


- ABS yellow plastic shower head, 190mm diameter
- ABS yellow plastic eye wash bowl, 300mm diameter
- ABS yellow plastic eye wash heads, flip open dust covers, internal filters and flow controls
- Yellow coated galvanised steel pipework and cast iron floor flange
- 1" chrome plated brass stay open ball valve with stainless steel pull handle and activation lever
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle
- 32mm waste fitting and flow rate 90 litres per minute
- BSP adaptors are supplied for all NPT pipe connections
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S2340 COMBINED SAFETY SHOWER AND EYE WASH WITH STAINLESS STEEL HEAD AND BOWL

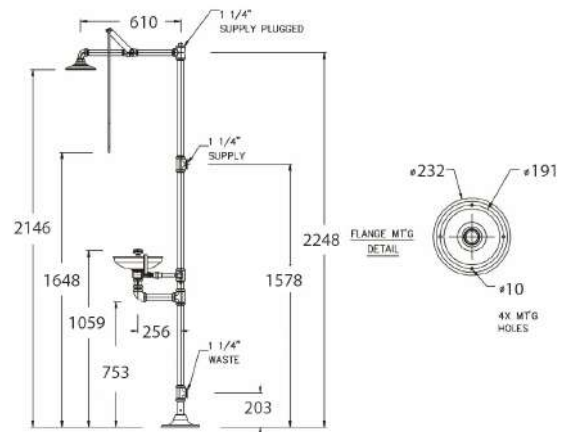


- Grade 304 stainless steel shower head, 200mm diameter
- Grade 304 stainless steel eye wash bowl, 300mm diameter
- ABS yellow plastic eye wash heads, flip open dust covers, internal filters and flow controls
- Yellow coated galvanised steel pipework and cast iron floor flange
- 1" chrome plated brass stay open ball valve with stainless steel pull handle and activation lever
- 1/2" chrome plated brass stay open ball valve with stainless steel push handle
- 32mm waste fitting and flow rate 90 litres per minute
- BSP adaptors are supplied for all NPT pipe connections
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S2340-AS ALL STAINLESS STEEL COMBINED SAFETY SHOWER AND EYE WASH

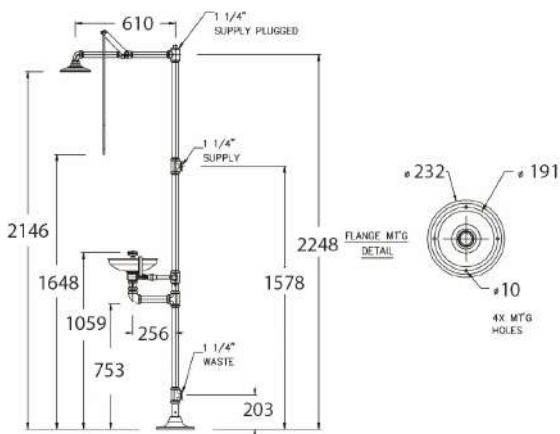

- Grade 304 stainless steel shower head, 200mm diameter
- Grade 304 stainless steel eye wash bowl, 300mm diameter
- ABS yellow plastic eye wash heads, flip open dust covers, internal filters and flow controls
- Grade 304 stainless steel pipework and floor flange
- 1" stainless steel stay open ball valve with stainless steel pull handle and activation lever
- 1/2" stainless steel stay open ball valve with stainless steel push handle
- 32mm waste fitting and flow rate 90 litres per minute
- BSP adaptors are supplied for all NPT pipe connections
- ANSI Z358.1 compliant, includes safety sign and weekly test card
- In stock 1 to 2 working days

S0000-STK SAFETY SHOWER TEST KIT

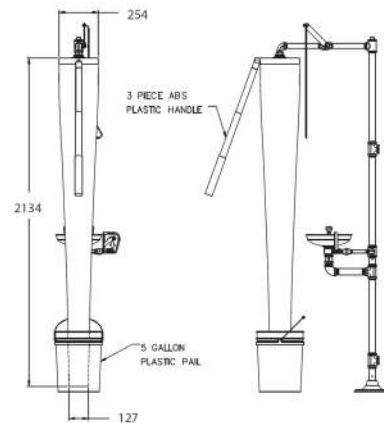

- Helps to prevent spillage and flooding when testing safety showers
- Many safety shower installations do not include drainage
- Yellow plastic 5 gallon bucket
- Waterproof test chute
- Long handle with test chute curtain ring
- Suitable for showers with a shower head diameter of 254mm and below
- All safety showers need testing to comply with regulations and standards
- Safety showers and eye wash units should be operated on a weekly basis
- In stock 1 to 2 working days